

# RT-0200

## PERFORMANCE DATA

**AIR TEC**

AIR SYSTEMS



Type	Number	RT-2003/3	RT-0200/1	
Phase		<b>3</b>	<b>1</b>	
Output	50Hz	0.20	0.20	
	Kw	0.25	0.25	
Voltage	50Hz	208-255/360-440	110-120/220-240	
	V	220-265/380-460	110-120/220-240	
Current	50Hz	1.2/0.69	3.4/1.7	
	Amp	1.3/0.75	3.6/1.8	
Vacuum	50Hz	70	70	
	mbar	75	75	
Pressure	50Hz	70	70	
	mbar	80	80	
Air Flow	50Hz	0.8	0.8	
	m <sup>3</sup> /min	1.0	1.0	
Insulation Class		<b>F</b>	<b>F</b>	
L1		90[3.55]	90[3.55]	
L2		209.5[8.25]	209.5[8.25]	

**AIR TEC**






AIR SYSTEMS

## RT-0200/3 series (Blowing Curve)

50Hz —————

60Hz —————

The technical data is based on 1 bar ( abs. ) free atmosphere and 20° Cwith Inlet air density 1.2kg/m³,includes 10%variance.

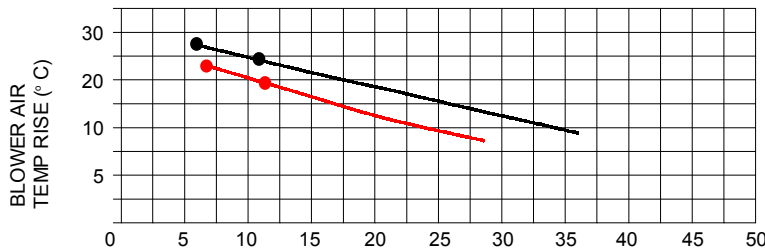
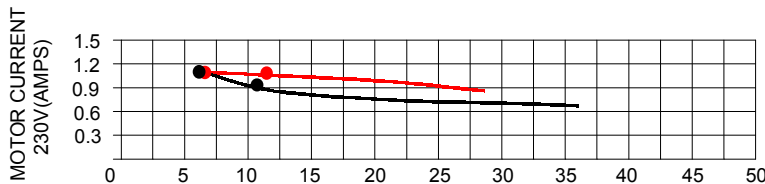
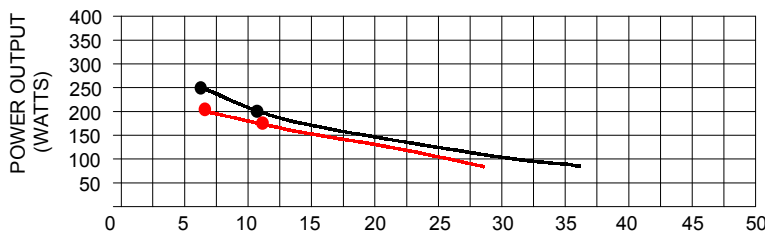
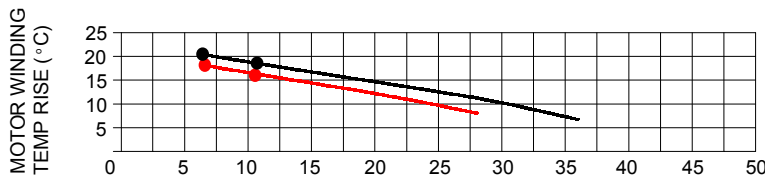
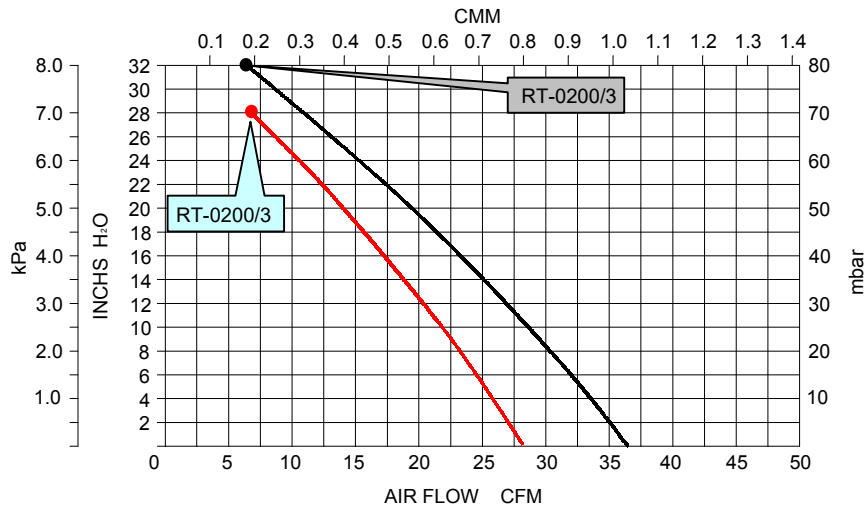


## RT-0200/3 series (Suction Curve)

50Hz —————

60Hz —————

The technical data is based on 1 bar ( abs. ) free atmosphere and 20° C with Inlet air density 1.2kg/m<sup>3</sup>, includes 10% variance.

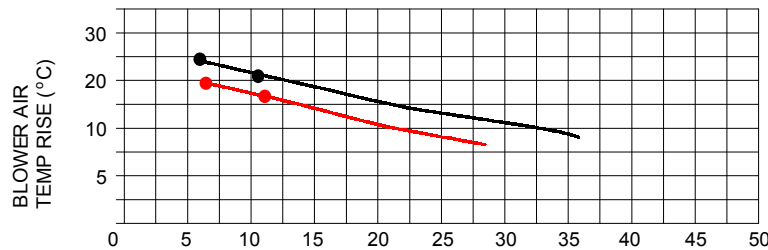
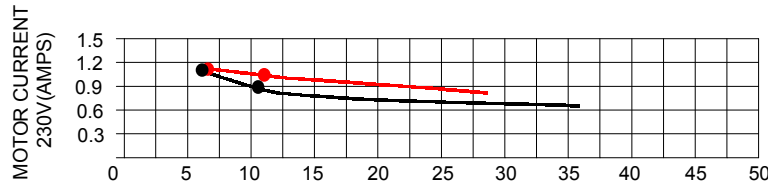
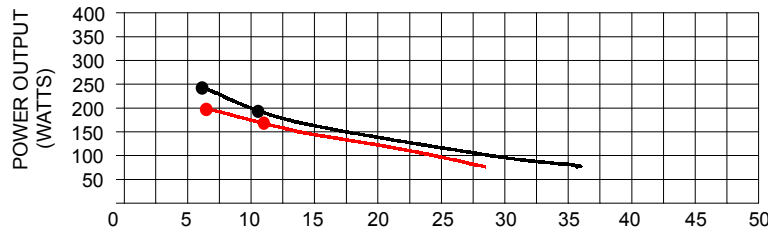
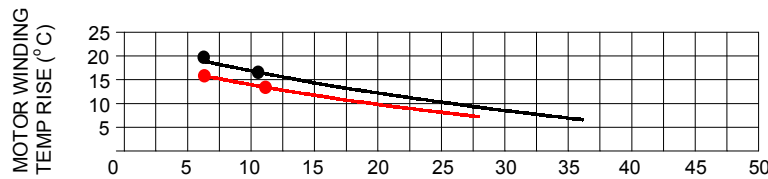
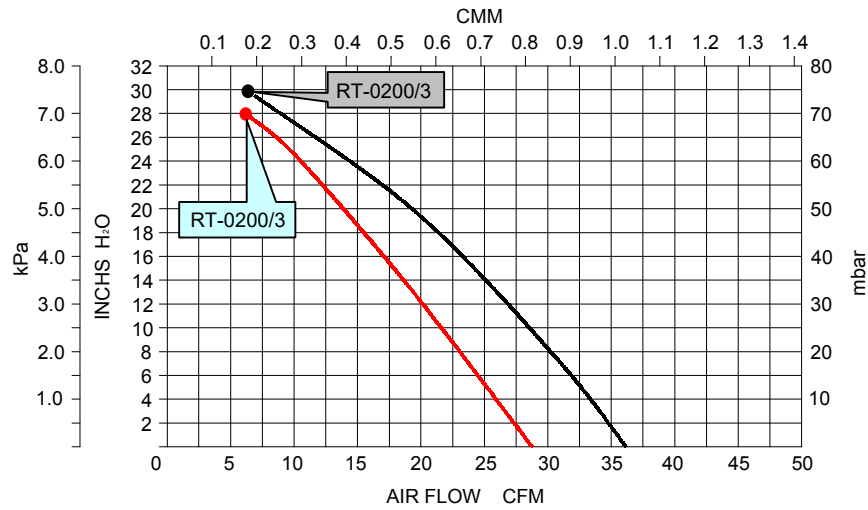


## RT-0200/1 series (Blowing Curve)

50Hz —————

60Hz —————

The technical data is based on 1 bar ( abs. ) free atmosphere and 20° C with Inlet air density 1.2kg/m<sup>3</sup>, includes 10% variance.

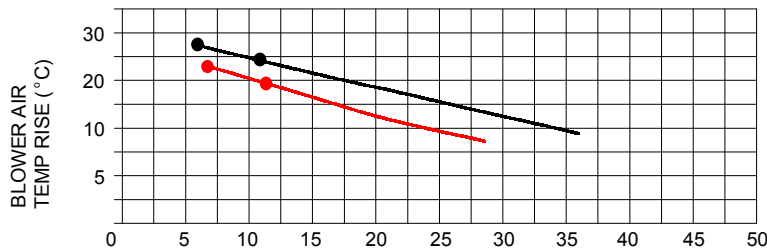
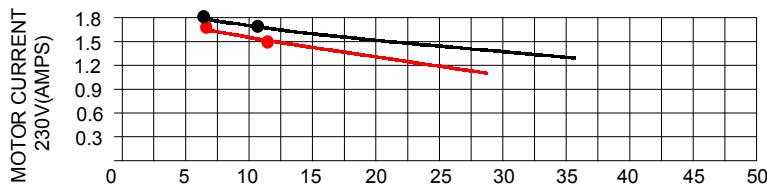
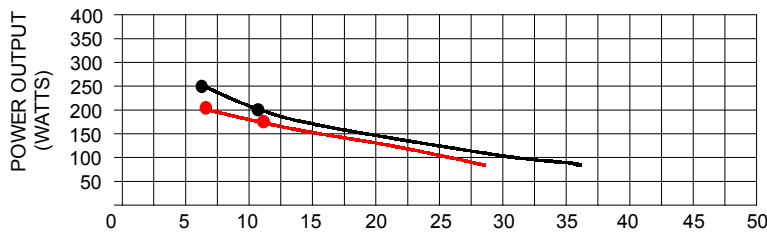
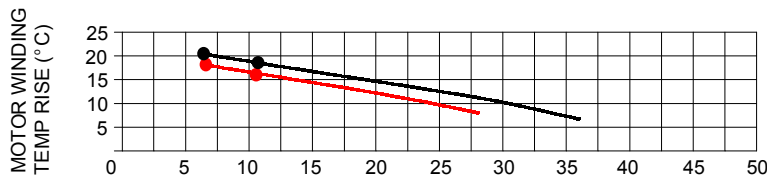
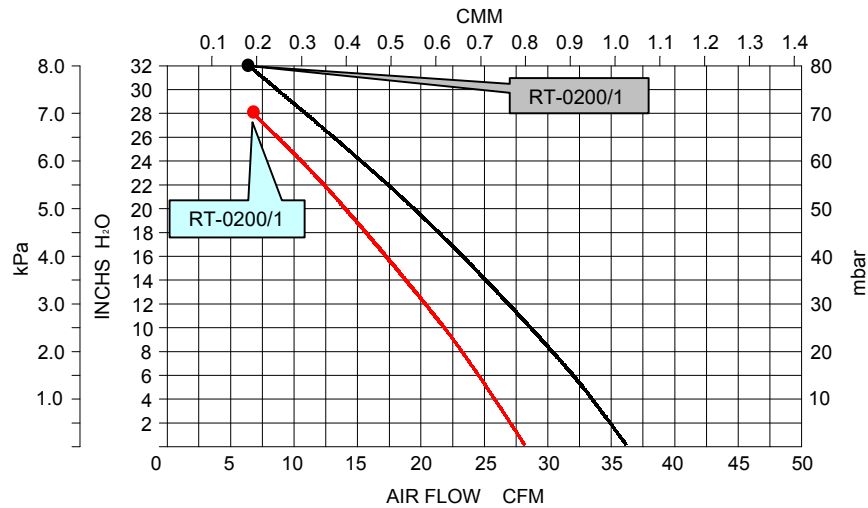






## RT-0200/1 series (Suction Curve)

50Hz

60Hz

The technical data is based on 1 bar ( abs. ) free atmosphere and 20° C with Inlet air density 1.2kg/m³, includes 10% variance.

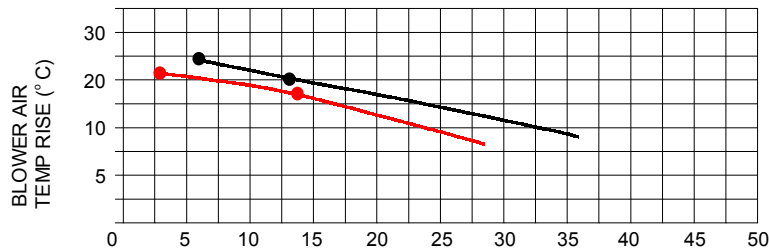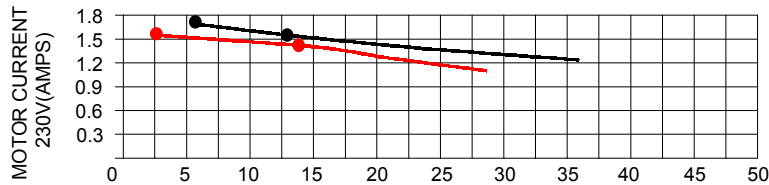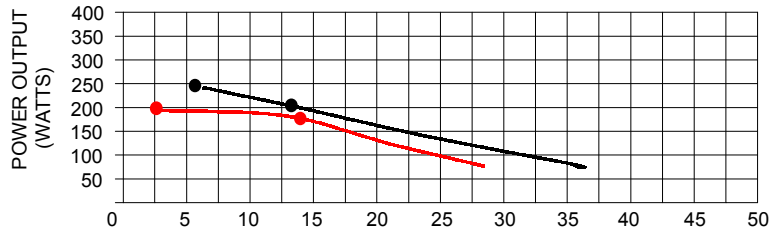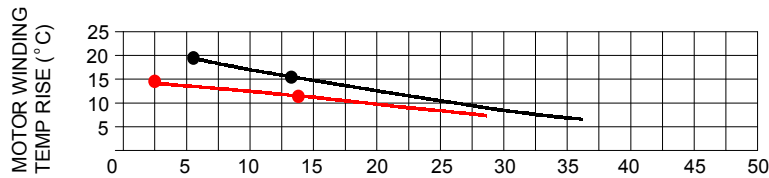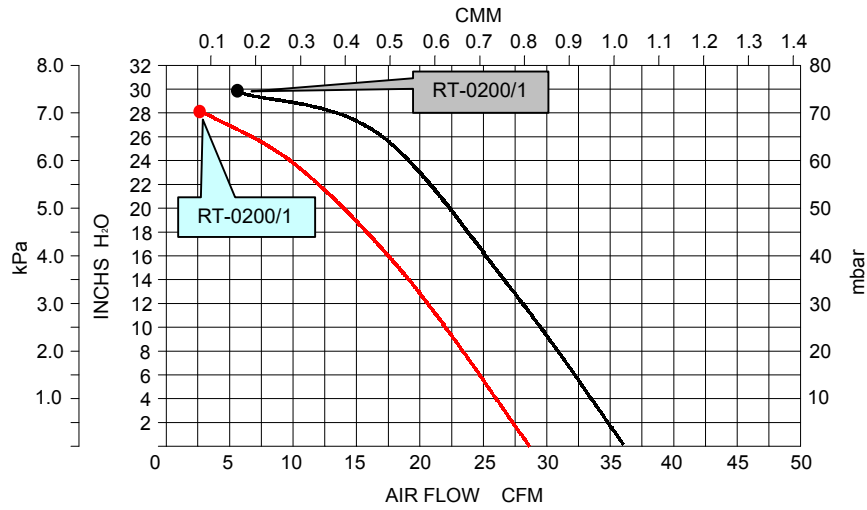

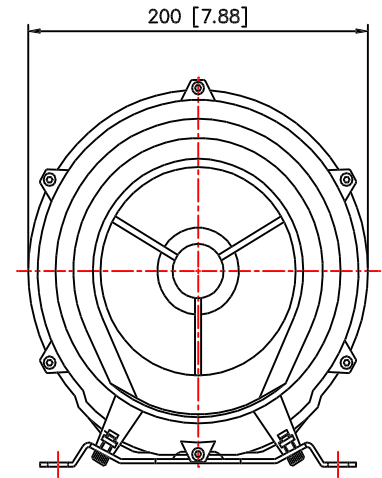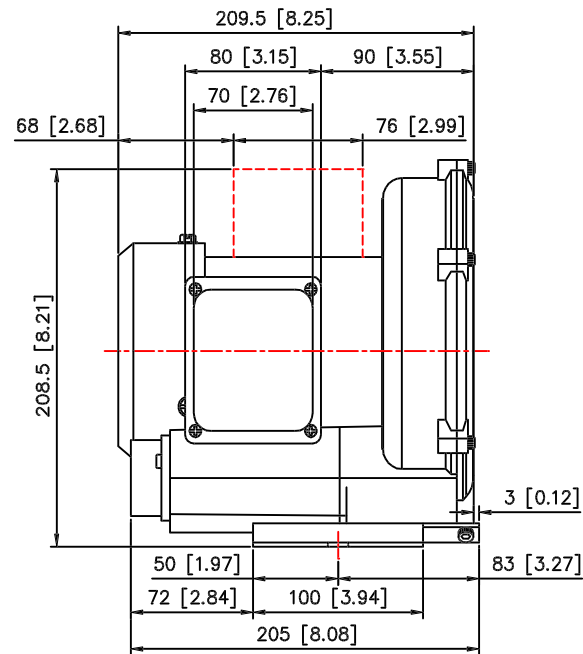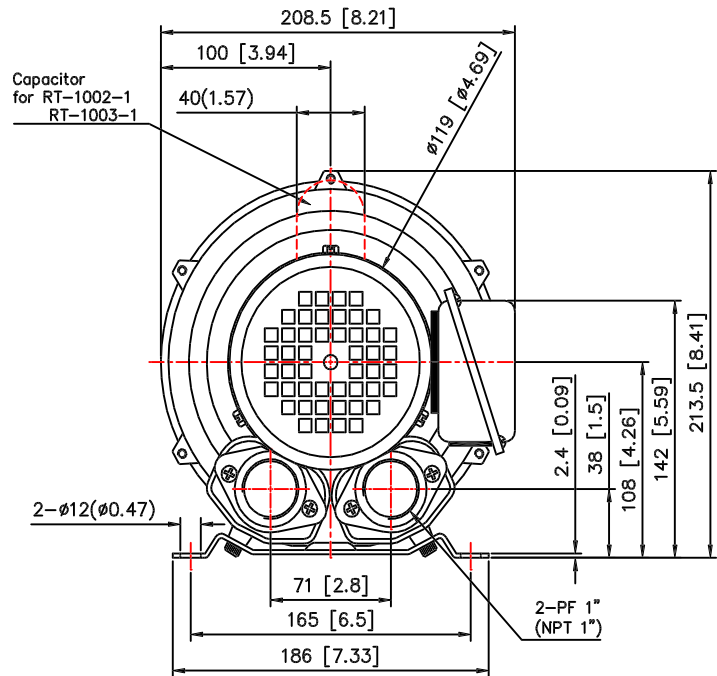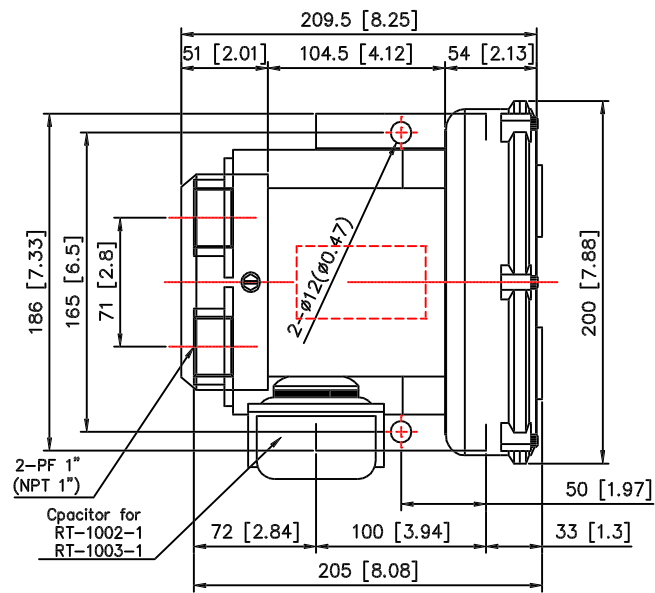

Drawing name : RT-0200