



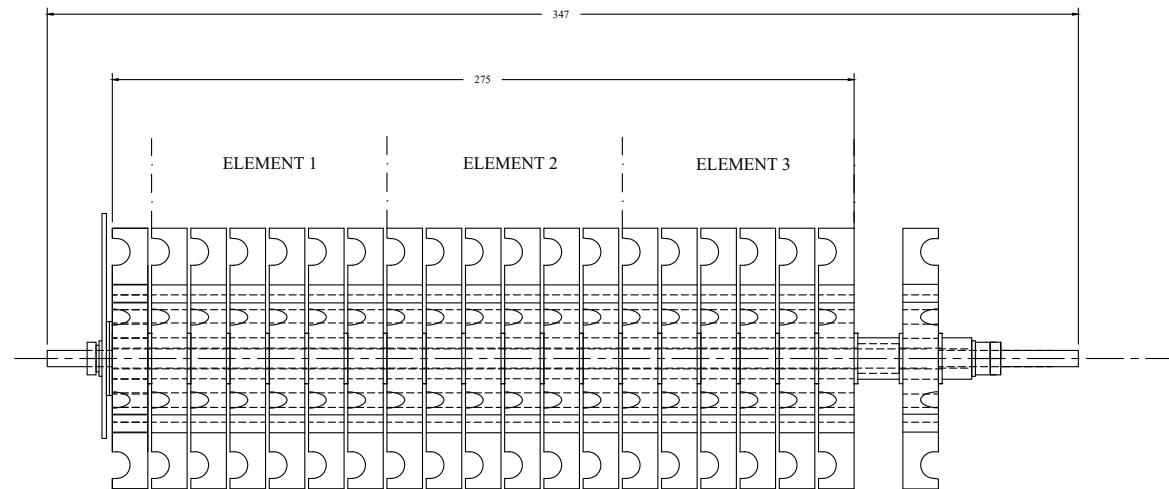


HEA1176 WIRING CONFIGURATIONS

MARK LEADS WITH SHRINK TUBE
L1 = BROWN
L2 = BLACK
L3 = GREY
N1, N2 & N3 = BLUE
DO NOT SHRINK
FASTEN IN PLACE WITH CABLE TIE


MARK ENDS OF TOP
CERAMIC N1, L1 etc. AS
DRAWING



3-PHASE & NEUTRAL (STAR)

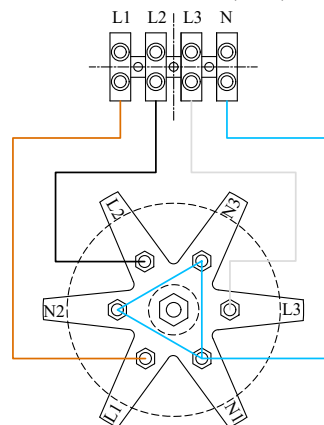

3-PHASE (DELTA) 415v

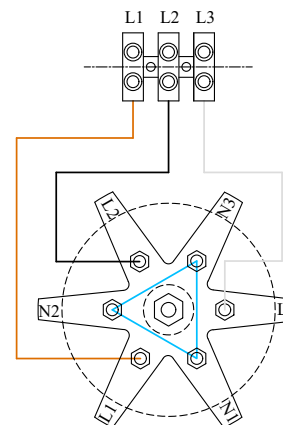

ELEMENT WIRING LAYOUT

9KW 240/415V 3 PHASE STAR
UNIT - 19.2 Ohms PER ELEMENT /
ZONE
GLASS FIBRE LEADS 16" LONG -
6 x 20 AMP